


Product Specifications

FlashLink Mini PDF In-Transit Logger

Measurement Range	-22°F to 158°F (-30°C to 70°C)
Accuracy	±1.0°F/0.5°C
Data Download Time	30 seconds typical
Factory Programmable	High & Low levels over entire range
Delay Start	30 minutes
Battery	Coin Cell Battery
Dimensions	1.87 in x 3.27 in x 0.236 in (47.3 mm x 83.0 mm x 6.0 mm)
Weight	0.367 oz. (10.4 grams)
Shelf Life	18 Months
Certification	CE Mark, Calibration traceable to NIST, RoHS Compliant
Display	Green and Red LED
Waterproof Rating	IP54 with silicone cap
Storage Conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
System Requirements	Windows PC with current operating system Adobe Reader
Download Requirements	Direct USB connection to PC, tablet or printer

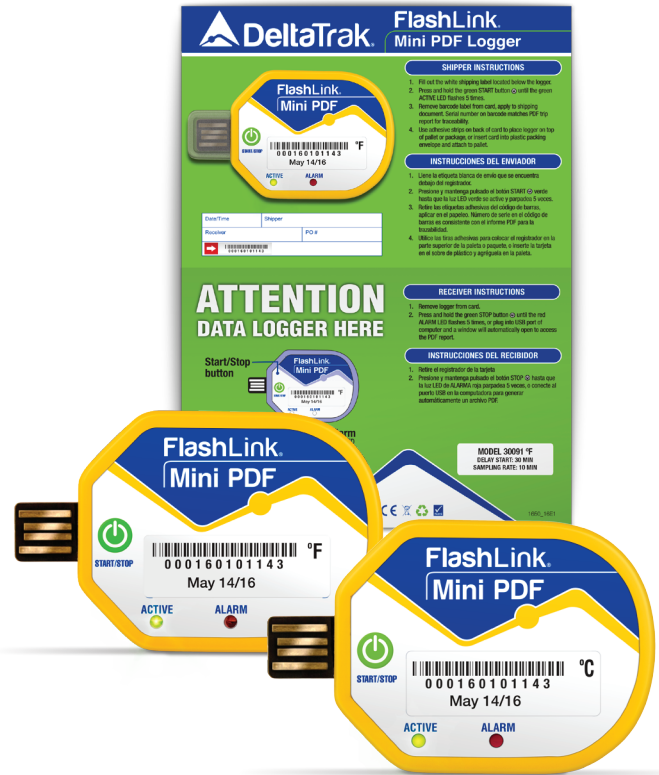

FlashLink Mini PDF with high visibility locator card

Models	30091	30092
Temperature Scale	°F	°C
Sample Rate	10 Min	10 Min
Data Capacity	12,960 data points	12,960 data points

- Compact, single-use, in-transit temperature logger
- No software required to download data
- Built-in USB connector, no special reading devices needed
- On board software automatically creates a PDF report
- One model for any trip duration
- Recorded data automatically scaled to a full graph on PDF report



SS 30091-92 16K1