


# Product Specifications

## FlashCheck. Certified Waterproof Lollipop Min/Max Thermometer

<b>Measurement Range</b>	-58°F to 392°F (-50°C to 200°C)
<b>Operating Range</b>	32°F to 122°F (0°C to 50°C)
<b>Accuracy</b>	±1°F (-4°F to 302°F) ±0.5°C (-20°C to 150°C) or ±1%, whichever is greatest
<b>Sensor</b>	Thermistor
<b>Display Resolution</b>	0.1°F/ °C
<b>Display Reading Update</b>	1 second
<b>Display Window Size</b>	0.77 in W x 0.37 in H (19.5 mm W x 9.5 mm H)
<b>Calibration</b>	N.I.S.T. Traceable Calibration Certificate
<b>Battery</b>	Button Cell Alkaline
<b>Body Casing</b>	ABS plastic
<b>Probe Dimensions</b>	4.13 in. (L) x 0.14 in. (Dia.) 105 mm (L) x 3.5 mm (Dia.)
<b>Weight</b>	1.4 oz. (40 gm)
<b>Waterproof Rating</b>	IP67
<b>Certification</b>	CE Mark, RoHS
DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system	

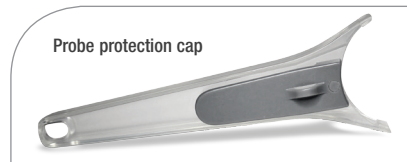

### Model 11049

- °F /°C selectable
- Min/Max memory stores lowest/highest readings until reset
- NIST traceable Calibration Certificate included
- Probe cover with pocket clip
- Waterproof housing, IP67 rated

SS0188 15D1

