


Product Specifications

FlashLink® BLE Gateway

Operating Range	-4°F to 149°F (-20°C - 65°C)
Power Source	Power Over Ethernet or DC 5V
Scanning	>200 BLE Loggers per second
Wireless Distance	100ft (30.5 meters)
Dimensions	6.5in x 6.5 in x 0.98in (165.1mm x 165.1mm x 24.9mm)
Casing	ABS
Display	Green & Red LED
Transmitting Method	Ethernet, Wi-Fi
Transmitting Protocol	HTTPS, MQTT
BLE Version	5.0
Network Security	<ul style="list-style-type: none">• Gateway communicates to cloud over MQTTS protocol on outgoing port 8092• MQTT communication secured via TLS v1.2• Gateway syncs time with a configured time server over outgoing port 123• Cloud makes no inbound connections to gateway, gateway makes outbound connections to MQTT broker only

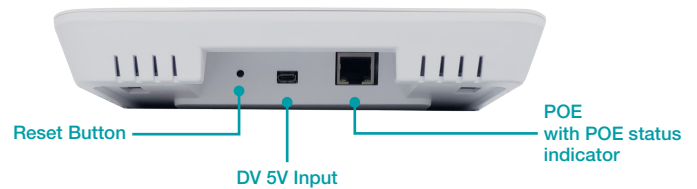

Model 40993

- Data automatically uploads to cloud-based application from BLE Logger
- Supports Wi-Fi and Ethernet connections
- Powered by DC or POE (Power over ethernet)
- Monitor temperature in cold storage facilities

DeltaTrak manufactures and operates under an ISO 9001:2015 registered quality management system

SS 40993 2511

